
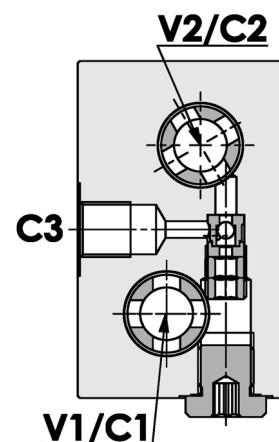


Valvola selettoria, flangiabile su motori Samhydraulik serie "AG/BG/AR/BR/ARSR/MB"

Shuttle valve, flangeable on Samhydraulik motors "AG/BG/AR/BR/ARSR/MB" series

Rev.02-2010/05

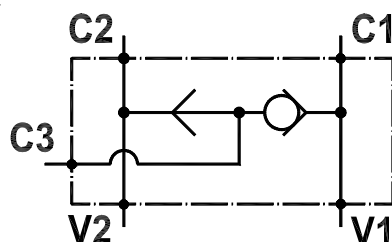

SPECIFICHE TECNICHE

Materiali: Corpo in lega di alluminio, parti interne in acciaio trattato termicamente.

Portata max.: 60 l/min

Pressione max.: 250 bar

Peso: 0,478 Kg

TECHNICAL SPECIFICATIONS

Materials: body is in high strenght aluminium alloy, internal parts in hardened steel.

Rated flow: 60 l/min


Max. pressure: 250 bar

Weight: 0,478 Kg

**Valvola selettiva, flangiabile su motori Samhydraulik serie
 "AG/BG/AR/BR/ARSR/MB"**

Shuttle valve, flangeable on Samhydraulik motors "AG/BG/AR/BR/ARSR/MB" series

Rev.02-2010/05

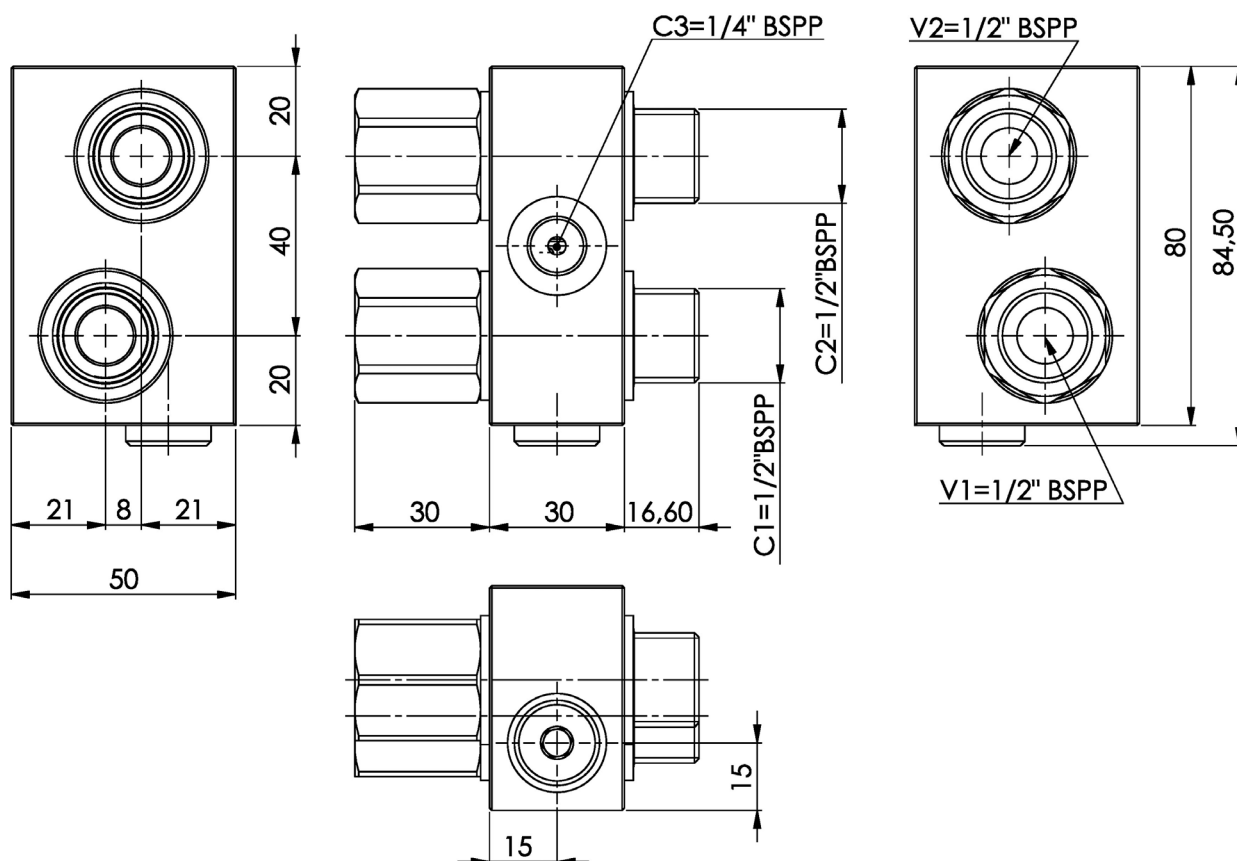

ESEMPIO DI ORDINAZIONE - ORDERING CODE EXAMPLE

F P T D V S 1 1 / 2 *

Guarnizioni - Seals:
 V=Viton *

Omettere se BUNA-N - Omit if BUNA-N